
Ethanol Processing Co-Products: Economics, Impacts, Sustainability

KURT A. ROSENTRATER

*USDA/ARS North Central Agricultural Research Laboratory
Brookings, SD*

The production of corn-based ethanol in the United States is dramatically increasing; as is the quantity of co-products generated from this processing sector. These streams are primarily utilized as livestock feed, which is a route that provides ethanol processors with a substantial revenue source and significantly increases the profitability of the production process. With the construction of many new plants in recent years, it is imperative to augment current uses and to find new outlets for these materials, in order to maintain the economic viability of this industry. Known collectively as distillers grains, these residuals have much potential for value-added processing and utilization in other sectors, but barriers currently exist. The goal of this article is to discuss five such constraints and opportunities: storability and handling, value-added livestock and other animal-feed use, human-food use, nontraditional processing into manufactured products, and potential use as sources of bioenergy. Addressing these issues will be essential to the growth of the industry, both in terms of developing new and refined methods for storing and handling these materials, and in identifying and developing new market opportunities for them. Ultimately, alleviating these constraints and pursuing these new possibilities will improve manufacturing economics and can augment the viability of the corn-based fuel-ethanol industry.

DDG CHALLENGES

Currently, the US fuel ethanol industry's only outlet for the nonfermentable residues resulting from the manufacturing process has been utilization as livestock feed. This approach to utilization is well established, but as the ethanol industry continues its rapid growth, and as the generated quantities of these distillers grains increase over time, this avenue needs to be augmented if it is to retain, or even increase, its current high-value economic returns.

Indeed, a host of issues surrounds the value and utilization of distillers grains, both from the ethanol production standpoint, and from a livestock-feeding perspective. Some of the most pressing include:

- the large quantities of energy required to remove water coupled with the high cost of energy; moving distillers dried grains with solubles (DDGS) to diverse and distant markets when there are fluctuations in supply and demand;
- how to avoid mycotoxin contamination;
- variability in nutrient content, quality, and associated quality-management programs, which ultimately impact end-users;
- lack of an industry-wide quality-grading system;
- inconsistent product identity and nomenclature;
- lack of standardized laboratory testing procedures;
- lack of education and technical support for the industry;
- international marketing and export challenges; and
- lack of a national byproduct organization to address these issues and spearhead marketing efforts for these co-products.

Indeed, a question that inevitably arises is, “What are we going to do with all of the DDGS?” These are discussed in more depth by Rausch and Belyea (2006), Rosentrater and Giglio (2005), Rosentrater (2006a) and UMN (2007).

A persistent barrier to effective distillers grains utilization is product storability and flowability—so much so that it has serious economic implications for ethanol plants. Opportunities to increase potential economic returns also include processing DDGS into high-value animal feeds, human foods and industrial composites. To date, however, very little has been published in the scientific literature addressing these four topics. These are all fertile areas for research, but a reference base from which to work is needed. They have tremendous implications for the successful growth of the industry.

STATUS OF THE US FUEL ETHANOL INDUSTRY—2007

With growing energy requirements, coupled with an increasing reliance on nonrenewable fossil fuels, markets for which have historically been quite volatile, the energy security needs of oil importing nations, including the United States, continue to escalate (EIA AEO, 2007). Biofuels—renewable sources of energy—can help meet these increasing needs, and can be produced from a variety of biomass materials including residue straw, corn stover, perennial grasses, legumes, and other agricultural and biological materials. At this time, however, the most heavily utilized substrate in the United States is corn starch. Although directly tied to the market value of the grain itself, fuel-ethanol production from corn is readily accomplished at a relatively low cost *vis-à-vis* other biomass sources. In fact, it is currently the only biological material that can be economically converted into ethanol on an industrial scale. The number of corn-ethanol plants, and their processing capacities, has been markedly increasing in recent years. At the beginning of 2007, for example, 110 manufacturing plants in the United States have an aggregate production

capacity of 5.5 billion gallons per year (20.8 billion liters per year). Moreover, seventy-six plants are currently under construction or expansion, and upon completion will contribute an additional 5.6 billion gallons per year (21.2 billion liters per year) (BBI, 2007; RFA, 2007a). As the ethanol market segment continues to grow, so do the quantities of processing residues, or co-products, that are generated.

In-depth details on ethanol manufacturing, which are beyond the scope of this discussion, can be found in Tibelius (1996), Dien *et al.* (2003), Jaques *et al.* (2003), Maisch (2003), Bothast and Schlicher (2005) and Weigel *et al.* (2005). Briefly, ethanol production from corn grain can be accomplished by wet-mill processing, which is very capital intensive, or dry-grind processing, which has substantially less capital and operational requirements, and thus has rapidly gained prevalence in the industry. The dry-grind production process (Fig. 1) consists of several key steps, including grinding, cooking, liquefying, saccharifying, fermenting, and distilling. Typically, there are three main products from a dry-grind facility:

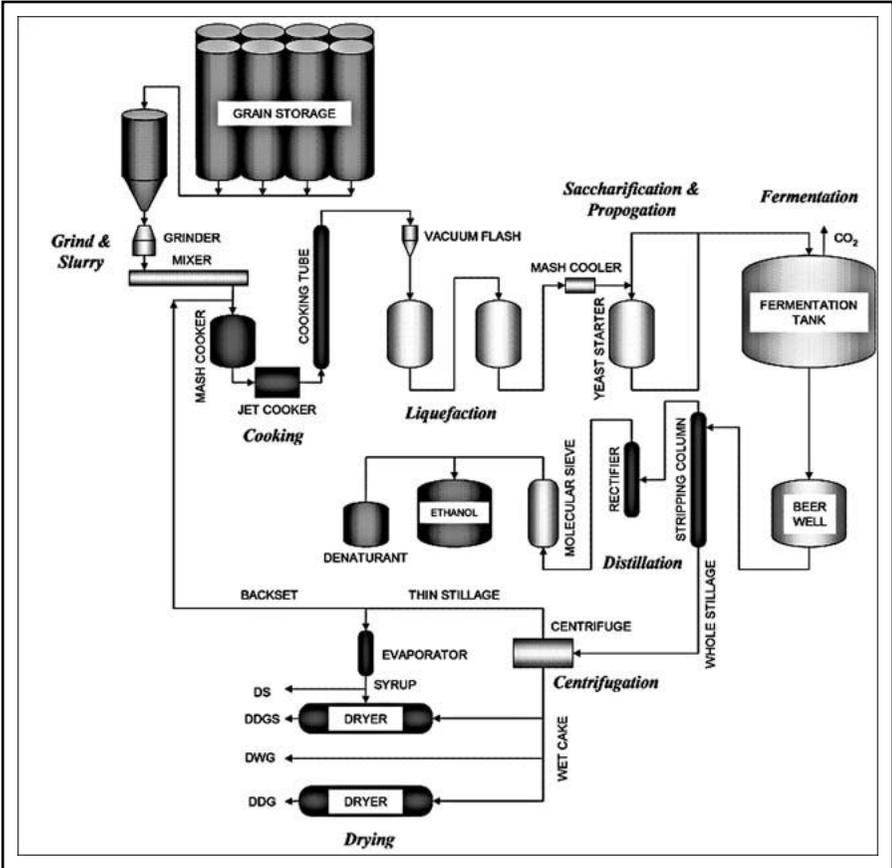


Figure 1. Process flow diagram of a typical dry grind corn-to-ethanol manufacturing plant.

- ethanol, the primary end product (approximately a third of the original corn mass);
- residual nonfermentable corn kernel components (approximately a third of the original corn mass), marketed primarily in the form of DDGS (Fig. 2), and to a lesser degree in the form of distillers dried grains (DDG), which do not contain added solubles, distillers wet grains (DWG; Fig. 3), and condensed distillers solubles (CDS; Fig. 4) (hereafter “distillers grains” will be used in a generic sense to refer to all of these residual materials); and
- carbon dioxide (approximately a third of the original corn mass).

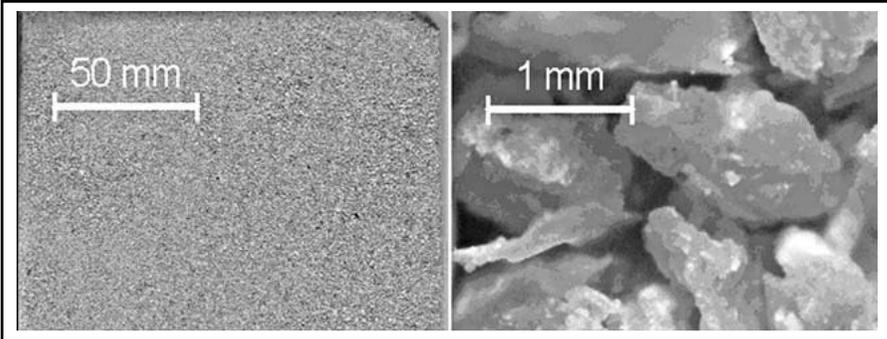


Figure 2. Solid non-fermentable residues—distillers dried grains with solubles (DDGS).



Figure 3. Solid non-fermentable residues—distillers wet grains (DWG).



Figure 4. Liquid non-fermentable residues—condensed distillers solubles (CDS).

Residue streams are separated from the ethanol during distillation. They are often dried to approximately 10% moisture content, to ensure a substantial shelf life, and then sold as distillers grains (generally DDG or DDGS) to local livestock producers or shipped via truck or rail to distant livestock feed markets. The sale of distillers grains contributes substantially to the economic viability of ethanol manufacturing (up to \$0.10 per liter of ethanol produced, depending on DDGS sales price), and is thus a vital component to each plant's operations. Because of the dynamics of the free-market economy, as this industry continues to grow the quantity of processing residues—and the ability to utilize them—will, in turn, significantly impact the future of the industry.

Historically, the ethanol industry's only outlet for non-fermentable residues has been as livestock-feed ingredients. This approach is well established, but needs to be augmented and optimized if it is to retain its high-value returns, especially as the generated quantities of these residues increase. Increased supply of distillers grains will affect the potential sales price *vis-à-vis* feed demand, which could severely impact the production economics of the industry in the near future. In order to address these challenges, the ethanol industry

needs a diversified utilization strategy, instead of the current unidirectional approach. If estimates of future ethanol production hold true, utilization as livestock feed alone may not prove to be sustainable and thus alternative avenues must be pursued. Potential routes should include value-added animal feeds, human foods, and industrial products. One of the major hurdles that must be addressed (even prior to developing these new uses) is to improve the storage and handling characteristics of these materials.

STORAGE, HANDLING, AND FLOWABILITY CHALLENGES

With the exponential growth of the fuel-ethanol industry in the past several years, substantial quantities of distillers grains are now being produced, and even more are anticipated in the foreseeable future. To utilize these as feeds, however, these materials are increasingly being transported greater distances via truck and rail, and must be stored in various structures, such as bins and silos, until final use. Unfortunately, discharge flow is often problematic, due to caking and bridging between particles, which frequently occurs during storage and transport. In fact, flowability has become a major issue to be addressed for effective sales, marketing, distribution, and utilization of distillers grains (Rosentrater and Giglio, 2005; Schlicher, 2005; Rosentrater 2006b). For example, because these co-products do not easily flow from rail cars, in order to induce flow, workers often hammer the car sides and hopper bottoms. This leads to severe damage to the rail cars themselves, repairs of which have become very expensive to ethanol-manufacturing companies. Large carriers, such as the BNSF and UP railroads have even prohibited DDGS shipments.

Even though anecdotal knowledge regarding flowability is present in the industry, it is often incomplete and proprietary in nature. Furthermore, no formal scientific studies have yet investigated handling or flow properties of distillers grains. From studies of other granular materials, though, it is probable that flowability problems may arise from a number of synergistically interacting factors, including product moisture, fat content, particle size distribution, storage temperature, relative humidity, time, compaction pressure distributions within the product mass, vibrations during transport and/or variations in levels of these factors throughout the storage process (Craik and Miller, 1958; Johanson, 1978; Moreyra and Peleg, 1981; Teunou *et al.* 1999; Fitzpatrick *et al.*, 2004a, 2004b).

Generally speaking, flowability is defined as the ability of granular solids and powders to flow. It is, in fact, not an inherent natural material characteristic, but rather is the consequence of several interacting properties that simultaneously influence material flow, environmental conditions, and the equipment used for handling, storing, and processing (Prescott and Barnum, 2000). Flow behavior is thus multidimensional, depending on many physical and chemical characteristics. Because of this, no single test can quantify a product's flowability; instead a suite of tests is required. In addition to the factors listed above, other properties that affect flowability can include protein, starch, and carbohydrate levels, as well as addition of flow-conditioning agents (Peleg and Hollenbach, 1984).

Knowledge of physical and flow characteristics of bulk solids is essential for the design of reliable storage systems and handling equipment. Toward this end, shear testers are the primary equipment used to measure the strength and flow properties of granular materi-

als. A shear test consists of two stages: measurement of consolidation (*i.e.*, compaction over time) and determination of particle strength. The measured strength depends on the degree of consolidation, and how it was achieved (*i.e.*, stress history). Each of these aspects is highly dependent upon the other (Schwedde, 2002). It has been found that stress history and anisotropic behavior have a strong influence on the particle strength of a bulk solid. It has also been concluded that a reliable prediction of the strength of a bulk solid can be achievable only if the stress history, and the directions of the major principal stresses during consolidation and failure, are known for specific applications.

Jenike (1964) developed the fundamental method for determining these flow characteristics. To analyze flow in bins and hoppers, and to develop a flow/no-flow criterion for various materials, Jenike used the principles of plastic failure with the Mohr-Coulomb failure criteria (Thomson, 1997). From a physical standpoint, the general principle is that granular flow is equivalent to solid failure due to shear. In ideal, free-flowing materials, resistance to flow is only the result of friction; in cohesive materials, however, inter-particle forces are enhanced by compaction, which can, in turn, produce mechanical strength and, thus, flow resistance (Peleg, 1983). Over the years, Jenike's direct shear cell tester and associated methodologies have become benchmarks for determining appropriate industrial design criteria for storage bins and silos. Jenike's shear cell has been used by many researchers for characterizing various granular materials. For example, the shear cell has been used to study the flow properties of various powders (Ashton *et al.*, 1965), cement (Schrämli, 1967), fine lactose powder with and without flow conditioners (York, 1975), wheat flour and sugar (Kamath *et al.*, 1993), wheat flour (Kamath *et al.*, 1994), confectionary sugar and detergent (Duffy and Puri, 1994), grains (Duffy and Puri, 1999) and milk powders (Fitzpatrick *et al.*, 2004b).

Carr (1965a, 1965b) also developed a number of standard procedures that permit the evaluation of flowability of granular materials, involving the determination of four main physical properties: angle of repose, compressibility, angle of spatula, and coefficient of uniformity (*i.e.*, cohesion). It does not, however, account for consolidation or stress history. Even so, the information determined by this methodology is also extremely useful for designing bins and hoppers so that appropriate material handling and particle flow can be achieved. This is especially true when used in conjunction with Jenike shear data.

Even though the Jenike and Carr procedures are commonly used in industry, to date no formal studies have investigated handling or flow properties of distillers grains. Determining the specific physical or chemical factors, or interactions thereof, that cause flowability problems for these materials should be undertaken, because solving this problem will have substantial economic ramifications throughout the fuel-ethanol industry. Storage and handling operations must be improved *vis-à-vis* current technologies and practices, especially as sales and distribution of these materials move beyond regional areas and become more national in scope. Preliminary studies in our laboratory indicate that consolidation may very well be a main contributor to many flowability problems observed in distillers grains; the other synergistically acting factors, however, remain to be analyzed and quantified.

VALUE-ADDED ANIMAL FEEDS

As with many food and organic processing residue streams, feeding distillers grains to livestock is a viable method of utilization because of their high nutrient levels. Over the years, numerous research studies have been conducted in order to assess co-product use as animal feed, including investigations focused on beef rations (Firkins *et al.*, 1985; Ham *et al.*, 1994; Lodge *et al.*, 1997; Peter *et al.*, 2000 Al-Suwaiegh *et al.*, 2002), dairy diets (Nichols *et al.*, 1998; Powers *et al.*, 1995; Schingoethe *et al.*, 1999; Hippen *et al.*, 2004; Kalscheur *et al.*, 2004), swine rations (Wahlstrom *et al.*, 1970; Cromwell *et al.*, 1993; Noblet *et al.*, 1994; Gralapp *et al.*, 2002; Shurson *et al.*, 2004; Whitney and Shurson, 2004), and poultry diets (Waldroup *et al.*, 1981; Parsons *et al.*, 1983; Noll *et al.*, 2002; Ergul *et al.*, 2003; Lumpkins *et al.*, 2003; Roberson, 2003). Aines *et al.* (1986) and UMN (2007) provide comprehensive reviews of this research.

But, much additional research must be done in order to maximize the inclusion of these residues in animal feeds, especially in light of the fact that as the processes employed in the industry evolve, the resulting quality and composition of the co-products thus continue to change. Distillers grains are often used in beef and dairy rations and, to a lesser extent, in swine and poultry diets; aquaculture feeds and pet foods are two market segments that are, as yet, untapped.

Protein-rich DDGS from ethanol plants have been used as livestock feed for many years. Feed conversion efficiency in fish, however, is typically much higher compared to traditional livestock. The cost of processing fish feed is one of the challenges for profitable fish cultivation. Due to the exponential increase in number of ethanol plants in recent years, though, DDGS are becoming readily available as a reasonably priced base material. And because they have a relatively high protein content, they may have potential as a fish-feed substitute for fish meal. Even though much literature is available on incorporation of distillers grains into the diets of various livestock species, very little has been accomplished in the aquaculture arena. Fish require unique physical and functional properties compared to other animal feeds (such as specific nutritional profiles). Additionally, pellet floatability is essential to many fish species; this can generally be achieved via extrusion processing. To date, only a little research has been carried out on utilizing DDGS as a protein source in aquaculture feed; limited work has investigated feeding trout, tilapia, prawns and catfish (James *et al.*, 1993; Webster *et al.*, 1993; Wu *et al.*, 1996, 1997; Cheng and Hardy, 2004a, 2004b; Cheng *et al.*, 2003; Coyle *et al.*, 2003, 2004). These studies have found that DDGS, in combination with other feed ingredients, could partially or even totally replace fish meal as a protein source, and that fish-growth performance could be maintained at acceptable levels.

Much work remains to improve and maximize the utilization of these co-products in animal feeds, both for ruminants as well as for mono-gastric species. Five key priorities must be addressed:

- densification, via pelleting or cubing, of DDGS streams and/or specific fractions in order to improve the bulk density, storability, transportation, and delivery for animal utilization—essential considerations include pellet compressibility, dura-

bility, digestibility, and other physical and nutritional properties of the densified feed products;

- processing of DDGS streams and/or specific fractions into value-added feed products, including aquaculture feeds and pet foods, which are untapped market segments and have much potential for growth;
- processing of DDGS streams and/or specific fractions with other relatively low-value processing/organic waste streams, in order to augment nutritional contents and produce novel feed ingredients;
- quantifying and enhancing storability, shelf life, and preservation of these resulting feed products (especially wet products); and
- feeding, growth performance, and acceptability testing of these novel feed products.

Preliminary trials in our laboratory indicate that extrusion processing is a promising technology for achievement of many of these priorities.

HUMAN FOODS

Historically, the benefits of diets containing high levels of dietary fiber have become well documented, including lowering of serum cholesterol levels, blood pressure, risk of heart disease, chance of various cancers, and improved weight loss/control (Burkitt, 1977; Anderson *et al.*, 1987; Anderson *et al.*, 1994; Mehta, 2005). Recently, diets that also contain low levels of carbohydrates (especially starch), such as the Atkins (Atkins, 1992) and South Beach diets (Agatston, 2003), have also become popular (Angelich and Symanski, 2004; Sloan, 2004; Hursh and Martin, 2005). Not only do diets that contain high fiber and low starch promote weight loss and control, but current research into glycemic response and resulting after-meal satiety indicates that these diets also have substantial health benefits for diabetic patients as well as those suffering from obesity (Li *et al.*, 2003; Brand-Miller, 2004; Gross *et al.*, 2004; Hofman *et al.*, 2004; Layman and Baum, 2004; Rendell *et al.*, 2005), not only for blood-sugar control in diagnosed patients, but also for prevention of diabetes and obesity onset. Because distillers grains are high in fiber and low in starch, they have potential for use in such dietary regimes.

Over the years, several studies have examined distillers grains as functional ingredients for human foods, including Bookwalter *et al.* (1984), Wall *et al.* (1984), Kim *et al.* (1989), Maga and Van Everen (1989), Rasco *et al.* (1990), Abbott *et al.* (1991), Brochetti *et al.* (1991) and Van Everen *et al.* (1992). These, and other prior investigations into use of distillers grains as food ingredients, have been thoroughly compiled and reviewed by Rosentrater and Krishnan (2006). Most prior studies have focused primarily on breads and cookies. To a lesser extent, other food products, including pastas, blended ingredients, extruded products and other miscellaneous food items have also been investigated. As Rosentrater and Krishnan (2006) have discussed, incorporation of distillers grains has generally been shown to impact the resulting organoleptic quality of food products, especially as inclusion/substitution rates increase. Most food products become darker in appearance when distillers residues are included. Most of the products studied indicated

a decreased functionality compared to the original components replaced by distillers grains, including resulting volume and expansion during baking, moisture absorption, texture, and mouth-feel. Moreover, products incorporating distillers byproducts at relatively high inclusion levels have shown a definite impact on flavor and are typically rated as marginally acceptable to not acceptable at all. Poor flavor could be improved, though, by bleaching and deodorizing prior to inclusion in the food matrix, because fatty acids that influence off-flavor development can be neutralized. Because of these challenges, it is not surprising that there is currently no commercial food product that incorporates ethanol-processing co-products.

As a direct result of the energy crises of the 1970s, the US fuel-ethanol industry began a slow but steady growth. Development of food products from distillers grains from this industry is not a new concept. In the 1980s, twenty-three studies were conducted and forty-seven food products were investigated. After the 1980s, the ethanol industry continued to grow, but interest in food products from distillers co-products waned considerably. In the 1990s, only eight studies were conducted and ten products investigated; in the 2000s, however, only one study and five products have been investigated thus far. As a result of this decline in interest, the lack of product-development work in last 15 years has become a hindrance to the utilization of distillers grains in food products, especially in light of the changes that these residues have undergone during this time period.

Numerous manufacturing improvements and process modifications have been realized over these years, particularly with the advent of the corn dry-grind production process. Now many of these “next generation” plants are in operation, and, in fact, comprise almost 80% of the entire industry (RFA, 2007a,b). Moreover, many additional dry-grind facilities are currently under construction. Dry-grind plants produce distillers grains with considerably different nutrient contents and physical properties from those produced by their predecessors—the corn wet mills of the 1980s (Spiehs *et al.*, 2002; Rosentrater *et al.*, 2005). As this industry continues to expand, many ethanol plants are increasingly interested in construction and operation at food-grade status, in order to expand the opportunities for utilization of distillers grains beyond traditional livestock feed. But, they do need market outlets for these new materials in order for this pursuit to succeed. Thus, a dedicated product-development initiative needs to address and optimize the use of these new processing residues, especially DDGS.

In order for viable food products to be successfully manufactured and marketed, considerable research is needed:

- analysis of current commercial DDGS streams and/or specific fractions for food-grade applicability, especially nutritional contents and chemical levels, including vitamins, minerals, nucleic acids, pigments, heavy metals, and toxic and other compounds that may be present;
- methods for processing and upgrading DDGS streams and/or specific fractions into food-grade ingredient streams, including:
 - various pretreatments, such as separation and concentration of proteins, fibers, lipids, or other compounds,

- washing, cleaning, and other quality-upgrading steps,
- bleaching,
- deodorizing,
- drying,
- sterilizing,
- milling into corn flour,
- storage stability and preservation, and
- analysis of any residues that result from these upgrading steps;
- nutritional enhancements that may be necessary to improve functionality, flavor and utilization potential;
- developing specific, marketable food products such as bakery goods, noodles, pastas, or other low-starch/high-protein/high-fiber foods;
- quantifying storability, shelf life and preservation of these resulting food products; and
- sensory analysis and acceptability testing of the resulting food products.

MANUFACTURED PRODUCTS

Beyond the realms of traditional livestock feed and potential human-food ingredients, very little work has been undertaken to develop other value-added applications for ethanol-residue streams. Initial trials have been conducted using these co-products as soil amendments and fertilizers (Erdem and Ok, 2002; Ramana *et al.*, 2002a, 2002b), extracting oil to produce industrial compounds and chemicals (Singh and Cheryan, 1998; Singh *et al.*, 2001; Kwiatkowski and Cheryan, 2002; Singh *et al.*, 2002), and extrusion processing (Rai *et al.*, 2004). Although manufacturing of distillers grains into industrial products is currently an untapped area, it is a potentially high-value avenue that should be pursued.

Modern manufacturing involves complex interactions among many factors, including product design, raw materials, manufacturing processes, as well as product distribution and sales. Thorough overviews of these topics have been provided by Creese (1999), Kalpakjian and Schmid (2001) and Geng (2004). In recent years, interest has grown in incorporating non-traditional, biological materials into traditional manufacturing operations to produce high-quality, cost-competitive, biodegradable finished products.

Progress in industrial biomaterials has accelerated in the last few decades as environmental consciousness has increased and production processes have become more efficient. A wide variety of viable bioproducts are produced industrially (Aberg *et al.*, 2002; Gandini and Belgacem, 2002), ranging from processing biomaterials into completely biobased finished products to utilizing them as additives or reinforcements in composites (Mohanty *et al.*, 2002). Available literature shows diverse applications, including biomedical (*e.g.* degradable protein sutures and implants), food-processing containers, packaging materials and structural members, to name only a few. The three product categories that

currently encompass the greatest number of viable biomaterials, however, are films, foams and composites.

Because of disposal problems with conventional films, many studies have targeted development of biodegradable counterparts (Thring *et al.*, 1997; Godbole *et al.*, 2003; Kayserilioglu *et al.*, 2003; Intabon *et al.*, 2004; Kumar *et al.*, 2004; Wang *et al.*, 2004b; Zhang and Whistler, 2004; Imam *et al.*, 2005), using compounds found in biological materials, such as alginic acid, arabinoxylan, cellulose, chitin, curdlan, lignin, soy protein, starch, xanthan, xylan, whey and zein. Biofilms are currently used in many products, including agricultural applications, such as landscaping and greenhouse construction (Briassoulis, 2004a, 2004b), as well as coating and packaging materials (Li and Chen, 2000). In addition to biodegradability, many of these studies have reported improved toughness and tensile strength by the inclusion of biological materials. Preliminary data indicate that distillers grains are a potential source of concentrated zein, which could be used for film production, although the functional state of these molecules is not yet known.

As most ultimately end their service lives in landfills, foams represent another area where biodegradability would be a tremendous asset. Biological materials have been used in a variety of insulation, packaging, and buoyancy products. Many foaming-development studies have been conducted using a host of biological materials, including wood fibers, starch, corn-stover fibers, and soybean oil (Fang and Hanna, 2000; Guo *et al.*, 2003; Ganjyal *et al.*, 2004; Javni *et al.*, 2004; Lee *et al.*, 2004). Many of these foams, however, although completely biodegradable, do not have sufficient mechanical strength and lack water resistance, both of which are barriers to widespread use. To address this, Fang and Hanna (2001) added degradable co-polyester to improve starch properties; the resulting foams exhibited water resistance and excellent resiliency against deformation while maintaining biodegradability. These foams were comparable to traditional polystyrene, which is not biodegradable and has limited recyclability. Preliminary studies in our laboratory indicate that distillers grains can be utilized to produce biodegradable foams as well; these trials have indicated excellent foaming and final-product properties, and thus warrant further study.

The third main category of use, composite products, encompasses a broad array of materials. Much research has been conducted in recent years (Lammers and Kromer, 2002; Colom *et al.*, 2003; Jayaraman, 2003; Keller, 2003; Lundquist *et al.*, 2003; Pothan *et al.*, 2003; Joshi *et al.*, 2004; Julson *et al.*, 2004; Wang *et al.*, 2004a). In addition to the production of finished biobased products, many biological materials have also been used to improve the physical and mechanical properties of conventional plastics. Examples cited in the literature often involve alternative use of residue materials produced in large quantities (*e.g.*, as a result of agro processing), as well as specific biomass crops grown for dedicated use in biomaterials: bagasse (Chiellini *et al.*, 2004; Rout *et al.*, 2003), flax fibers (Joffe *et al.*, 2003; Baiardo *et al.*, 2004; Wang *et al.*, 2004a), palm fibers (Sreekala and Thomas, 2003; Abu-Skarkh *et al.*, 2004), sisal fibers (Li *et al.*, 2000; Joseph *et al.*, 2003), jute fibers (Ray *et al.*, 2002; Khan *et al.*, 2005), soy products (Ashby *et al.*, 2004; Swain *et al.*, 2004), and corn-processing co-products (Julson *et al.*, 2004; Montgomery, 2004). Many of these studies show that use of biomaterials as fillers can lead to substantially

improved properties in the resulting composite plastics. Preliminary experiments in our laboratory indicate that distillers grains can be utilized to produce durable biodegradable composites when injection molded with thermoplastics or compression molded with phenolic resins.

The goals of utilizing biomaterials often include offering alternatives for bioprocessing residues and byproducts, decreasing manufacturing costs and improving final product biodegradability. But, the applicability of a given biomaterial must first be determined before it can be used in an actual manufacturing environment, and its compatibility with specific polymers and resins must be determined before it can be used effectively and economically. Findings of previous studies discussed here, compounded with those of many other researchers in the literature, suggest that the potential for biobased products is continuing to increase, and that more focus on investigating compatibility and methods of manufacture is needed for these materials.

Many potential avenues for utilization of distillers grains beyond feed and food do exist, and should be investigated in order to increase possible value-added uses. Based on our own preliminary laboratory investigations, it appears that distillers grains do have much potential for manufacturing into various biobased products, including films, foams, and composites.

CONCLUSIONS

The US corn-based fuel-ethanol industry is currently experiencing unprecedented growth. In conjunction with this expansion, the quantity of distillers grains produced has grown. This industry has continually evolved and technological innovations and process changes have been implemented that have improved process efficiencies, but have also affected the resulting co-product streams. As a consequence, new questions, challenges, and opportunities for utilizing these residues have arisen. As the quantity of these materials continues to grow, it is vital that value-added uses for distillers grains continue to be developed and augmented. Many issues currently face the ethanol industry in this regard. This article has discussed one of these: flowability. Addressing this challenge will have a substantial impact on the industry, as new or improved processes that lead to enhanced DDGS storability and flowability behavior are realized. This article has also reviewed three areas where substantial potential lies for value-added processing and utilization, including animal feeds, human foods, and industrial products. Pursuing these can lead to increased utilization of DDGS, thus preventing saturation of the livestock feeds market with ethanol co-products. Ultimately, addressing the topics discussed in this paper could lead to enhanced economic viability for the entire ethanol industry.

REFERENCES

- Abbott J *et al.* (1991) Dried distillers' grains with solubles: Particle size effects on volume and acceptability of baked products. *Journal of Food Science* 56(5) 1323–1326.
- Aberg CM *et al.* (2002) Renewable resources and enzymatic processes to create functional polymers: adapting materials and reactions from food processing. *Journal of Polymers and the Environment* 10(3) 77–84.

- Abu-Sharkh BF *et al.* (2004) Effect of epolene E-43 as a compatibilizer on the mechanical properties of palm fibre-poly(propylene) composites. *Journal of Applied Polymer Science* 92 2581–2592.
- Agatston A (2003) *The South Beach Diet*. New York: Rodale, Inc.
- Aines G *et al.* (1986) Distillers Grains, MP51. University of Nebraska Cooperative Extension. <http://ianrpubs.unl.edu/fieldcrops/mp51.htm>.
- Al-Suwaiegh S *et al.* (2002) Utilization of distillers grains from the fermentation of sorghum or corn in diets for finishing beef and lactating dairy cattle. *Journal of Animal Science* 80 1105–1111.
- Anderson JW *et al.* (1987) Dietary fiber and diabetes: a comprehensive review and practical application. *Journal of the American Dietetic Association* 87(9) 1189–1197.
- Anderson JW *et al.* (1994) Health benefits and practical aspects of high-fiber diets. *American Journal of Clinical Nutrition* 59 1242S–1247S.
- Angelich APR Symanski EV (2004) Challenges in formulating low-carb bread products. *Cereal Foods World* 49(6) 326–330.
- Ashby RD *et al.* (2004) Bacterial poly(hydroxyalkanoate) polymer production from the biodiesel co-product stream. *Journal of Polymers and the Environment* 12(3) 105–112.
- Ashton MD *et al.* (1965) Some investigations into the strength and flow properties of powders. *Rheologica Acta* 4(3) 206–218.
- Atkins RC (1992) *Dr. Atkins' New Diet Revolution*. New York: Avon.
- Baiardo M *et al.* (2004) Flax fibre-polyester composites. *Composites: Part A* 35 703–710.
- BBI (2007) U.S. Production Capacity. Existing Plants. BBI International. <http://www.ethanolproducer.com/plant-list.jsp>.
- Bookwalter GN *et al.* (1984) Corn distillers' grain and other by-products of alcohol production in blended foods. II. Sensory, stability, and processing studies. *Cereal Chemistry* 61(6) 509–513.
- Bothast RJ Schlicher MA (2005) Biotechnological processes for conversion of corn into ethanol. *Applied Microbiology and Biotechnology* 67 19–25.
- Brand-Miller JC (2004) Postprandial glycemia, glycemic index, and the prevention of type 2 diabetes. *American Journal of Clinical Nutrition* 80 243–244.
- Briassoulis D (2004a) An overview on the mechanical behavior of biodegradable agricultural films. *Journal of Polymers and the Environment* 12(2) 65–81.
- Briassoulis D (2004b) Mechanical design requirements for low tunnel biodegradable and conventional films. *Biosystems Engineering* 87(2) 209–223.
- Brochetti D *et al.* (1991) Yeast bread containing distillers' dried grain: dough development and bread quality. *Journal of Food Quality* 14(4) 331–344.
- Burkitt D (1977) Food fiber: benefits from a surgeon's perspective. *Cereal Foods World* 22(1) 6–9.
- Carr RL (1965a) Classifying flow properties of solids. *Chemical Engineering* 72(3) 69–72.

- Carr RL (1965b) Evaluating flow properties of solids. *Chemical Engineering* 72(3) 163–168.
- Cheng ZJ *et al.* (2003) Effects of supplementing methionine hydroxy analogue in soybean meal and distiller's dried grain-based diets on the performance and nutrient retention of rainbow trout [*Oncorhynchus mykiss* (Walbaum)]. *Aquaculture Research* 34 1303–1310.
- Cheng ZJ Hardy RW (2004a) Effects of microbial phytase supplementation in corn distiller's dried grain with solubles on nutrient digestibility and growth performance of rainbow trout, *Oncorhynchus mykiss*. *Journal of Applied Aquaculture* 15(3/4) 83–100.
- Cheng ZJ Hardy RW (2004b) Nutritional value of diets containing distiller's dried grain with solubles for rainbow trout, *Oncorhynchus mykiss*. *Journal of Applied Aquaculture* 15(3/4) 101–113.
- Chiellini E *et al.* (2004) Thermomechanical behavior of poly(vinyl alcohol) and sugar cane bagasse composites. *Journal of Applied Polymer Science* 92 426–432.
- Colom X *et al.* (2003) Effects of different treatments on the interface of HDPE/lignocellulosic fiber composites. *Composites Science and Technology* 63 161–169.
- Coyle S *et al.* (2003) A comparison of two feeding technologies in freshwater prawns, *Macrobrachium rosenbergii*, raised at high biomass densities in temperate ponds. *Journal of Applied Aquaculture* 14(1/2) 123–135.
- Coyle S *et al.* (2004) Effect of different feeding strategies on production and economic returns for freshwater prawn, *Macrobrachium rosenbergii*, raised in earthen ponds in a temperate climate. *Journal of Applied Aquaculture*. 16(1/2) 147–156.
- Craik DJ Miller BF (1958) The flow properties of powders under humid conditions. *Journal of Pharmacy and Pharmacology* 10 136–144
- Creese RC (1999) *Introduction to Manufacturing Processes and Materials*. New York: Marcel Dekker.
- Cromwell G L *et al.* (1993) Physical, chemical, and nutritional characteristics of distillers dried grains with solubles for chicks and pigs. *Journal of Animal Science* 71 679–686.
- Dien BS *et al.* (2003) The U.S. corn ethanol industry: an overview of current technology and future prospects. In: *The Third International Starch Technology Conference—Coproducts Program Proceedings* (Tumbleson M *et al.* eds). Urbana-Champaign: University of Illinois, pp 10–21.
- Duffy SP Puri VM (1994) Effect of Moisture Content on Flow Properties of Powders. ASAE Paper No. 944033. St. Joseph, MI: ASAE. <http://www.asabe.org>.
- Duffy SP Puri VM (1999) Measurement and comparison of flowability parameters of coated cottonseeds, shelled corn and soybeans at three moisture contents. *Transactions of the ASAE* 42(5) 1423–1427.
- EIA AEO (2007) *Annual Energy Outlook 2007*. U.S. Department of Energy, Energy Information Administration. <http://www.eia.doe.gov>.
- Erdem N Ok SS (2002) Effect of brewery sludge amendments on some chemical properties of acid soil in pot experiments. *Bioresource Technology* 84 271–273.

- Ergul T *et al.* (2003) Amino acid digestibility in corn distillers dried grains with solubles. *Poultry Science* 82 (Suppl. 1) 70.
- Fang Q Hanna MA (2000) Mechanical properties of starch-based foams as affected by ingredient formulations and foam physical characteristics. *Transactions of the ASAE* 43(6) 1715–1723.
- Fang Q Hanna MA (2001) Preparation and characterization of biodegradable copolyester-starch based foams. *Bioresource Technology* 78 115–122.
- Firkins JL *et al.* (1985) Evaluation of wet and dry distillers grains and wet and dry corn gluten feeds for ruminants. *Journal of Animal Science* 60 847–860.
- Fitzpatrick JJ *et al.* (2004a) Flow property measurement of food powders and sensitivity of Jenike's hopper design methodology to the measured values. *Journal of Food Engineering* 61(3) 399–405.
- Fitzpatrick JJ *et al.* (2004b) Effect of powder properties and storage conditions on the flowability of milk powders with different fat contents. *Journal of Food Engineering* 64(4) 435–444.
- Gandini A Belgacem MN (2002) Recent contributions to the preparation of polymers derived from renewable resources. *Journal of Polymers and the Environment* 10(3) 105–114.
- Ganjyal GM *et al.* (2004) Biodegradable packaging foams of starch acetate blended with corn stalk fibers. *Journal of Applied Polymer Science* 93 2627–2633.
- Geng H (2004) *Manufacturing Engineering Handbook*. New York: McGraw-Hill.
- Godbole S *et al.* (2003) Preparation and characterization of biodegradable poly-3-hydroxybutyrate-starch blend films. *Bioresource Technology* 86 33–37.
- Gralapp AK *et al.* (2002) Effects of dietary ingredients on manure characteristics and odorous emissions from swine. *Journal of Animal Science* 80 1512–1519.
- Gross LS *et al.* (2004) Increased consumption of refined carbohydrates and the epidemic of type 2 diabetes in the United States: an ecologic assessment. *American Journal of Clinical Nutrition* 79 774–779.
- Guo G *et al.* (2003) Critical processing temperature in the manufacture of fine-celled plastic/wood-fiber composite foams. *Journal of Applied Polymer Science* 91 621–629.
- Ham GA *et al.* (1994) Wet corn distillers byproducts compared with dried corn distillers grains with solubles as a source of protein and energy for ruminants. *Journal of Animal Science* 72 3246–3257.
- Hippen AR *et al.* (2004) Increasing inclusion of dried corn distillers grains in dairy cow diets. *Journal of Dairy Science* 87 (Suppl. 1).
- Hofman Z *et al.* (2004) The effect of different nutritional feeds on the postprandial glucose response in healthy volunteers and patients with type II diabetes. *European Journal of Clinical Nutrition* 58 1553–1556.
- Hursh H Martin J (2005) Low-carb and beyond: the health benefits of inulin. *Cereal Foods World* 50(2) 57–60.
- Imam SH *et al.* (2005) Characterization of biodegradable composite films prepared from blends of poly(vinyl alcohol), cornstarch, and lignocellulosic fiber. *Journal of Polymers and the Environment* 13(1) 47–55.

- Intabon K *et al.* (2004) Sodium docecyl sulfate and agar improve physical properties of plastic films made with soy curd residue protein. ASAE Paper No. 046074. St. Joseph, MI: ASAE. <http://www.asabe.org>.
- James H *et al.* (1993) Partial and total replacement of fish meal with soybean meal and distillers' by-products in diets for pond culture of the fresh water prawn (*Macrobrachium rosenbergii*). *Aquaculture* 118 119–130.
- Jaques KA *et al.* (2003) *The Alcohol Textbook*. Nottingham: Nottingham University Press.
- Javni I *et al.* (2004) Soybean-oil-based polyisocyanurate rigid foams. *Journal of Polymers and the Environment* 12(3) 123–129.
- Jayaraman K (2003) Manufacturing sisal-polypropylene composites with minimum fibre degradation. *Composites Science and Technology* 63 367–374.
- Jenike AW (1964) Storage and flow of solids. Bulletin No. 123. Utah Engineering Station. Logan, UT: Utah State University.
- Joffe R *et al.* (2003) Strength and adhesion characteristics of elementary flax fibres with different surface treatments. *Composites: Part A* 34 603–612.
- Johanson JR (1978) Know your material—how to predict and use the properties of bulk solids. *Chemical Engineering, Desk Book Issue* 9–17.
- Joseph PV *et al.* (2003) Dynamic mechanical properties of short sisal fibre reinforced polypropylene composites. *Composites: Part A* 34 275–290.
- Joshi SV *et al.* (2004) Are natural fiber composites environmentally superior to glass fiber reinforced composites? *Composites: Part A* 35 371–376.
- Julson JL *et al.* (2004) Mechanical properties of biorenewable fiber/plastic composites. *Journal of Applied Polymer Science* 93 2484–2493.
- Kalpakjian S Schmid SR (2001) *Manufacturing Engineering and Technology*, 4th Ed. Upper Saddle River: Prentice Hall.
- Kalscheur KF *et al.* (2004) Growth of dairy heifers fed wet corn distillers grains ensiled with other feeds. *Journal of Dairy Science* 87 (Supp. 1).
- Kamath S *et al.* (1993) Flow properties of powders using four testers—measurement, comparison and assessment. *Powder Technology* 76 277–289.
- Kamath S *et al.* (1994) Flow property measurement using the Jenike cell for wheat flour at various moisture contents and consolidation times. *Powder Technology* 81(3) 293–297.
- Kayserilioglu BS *et al.* (2003) Use of xylan, an agricultural by-product, in wheat gluten based biodegradable films: mechanical, solubility and water vapor transfer rate properties. *Bioresource Technology* 87 239–246.
- Keller A (2003) Compounding and mechanical properties of biodegradable hemp fibre composites. *Composites Science and Technology* 63 1307–1316.
- Khan MA *et al.* (2005) Effect of 2-hydroxyethyl methacrylate (HEMA) on the mechanical and thermal properties of jute-polycarbonate composite. *Composites: Part A* 36 71–81.
- Kim CH *et al.* (1989) Properties of extruded blends of wheat dried distiller grain flour with other flours. *International Journal of Food Science and Technology* 24(4) 373–384.

- Kumar MS *et al.* (2004) Production of biodegradable plastics from activated sludge generated from a food processing industrial wastewater treatment plant. *Bioresource Technology* 95 327–330.
- Kwiatkowski J Cheryan M (2002) Ethanol extraction of oil from dry-milled corn: process optimization and rheological properties of the extract. ASAE Paper No. 026144. St. Joseph, MI: ASAE. <http://www.asabe.org>.
- Lammers PS Kromer K-H (2002) Competitive natural fibre used in composite materials for automotive parts. ASAE Paper No. 026167. St. Joseph, MI: ASAE. <http://www.asabe.org>.
- Layman DK Baum JI (2004) Dietary protein impact on glycemic control during weight loss. *Journal of Nutrition* 134(4) 968S–973S.
- Lee S-H *et al.* (2004) Polyol recovery from biomass-based polyurethane foam by glycolysis. *Journal of Applied Polymer Science* 95 975–980.
- Li J Chen H (2000) Biodegradation of whey protein-based edible films. *Journal of Polymers and the Environment* 8(3) 135–143.
- Li J *et al.* (2003) Long-term effects of high dietary fiber intake on glucose tolerance and lipid metabolism in GK rats: comparison among barley, rice, and cornstarch. *Metabolism* 52(9) 1206–1210.
- Li Y *et al.* (2000) Sisal fibre and its composites: a review of recent developments. *Composites Science and Technology* 60 2037–2055.
- Lodge SL *et al.* (1997) Evaluation of corn and sorghum distillers byproducts. *Journal of Animal Science* 75 37–43.
- Lumpkins BL *et al.* (2003) Evaluation of distiller's grains with solubles as a feed ingredient for broilers. *Poultry Science* 82 (Suppl. 1) 115.
- Lundquist L *et al.* (2003) Novel pulp fibre reinforced thermoplastic composites. *Composites Science and Technology* 63 137–152.
- Maga JA Van Everen KE (1989) Chemical and sensory properties of whole wheat pasta products supplemented with wheat-derived dried distillers grain (DDG). *Journal of Food Processing and Preservation* 13 71–78.
- Maisch WF (2003) Fermentation processes and products. In: *Corn Chemistry and Technology*, 2nd Ed. (White PJ Johnson LA eds) St Paul, MN: American Association of Cereal Chemists, 695–721.
- Mehta RS (2005) Dietary fiber benefits. *Cereal Foods World* 50(2) 66–71.
- Mohanty AK *et al.* (2002) Sustainable bio-composites from renewable resources: opportunities and challenges in the green materials world. *Journal of Polymers and the Environment* 10(1/2) 19–26.
- Montgomery R (2004) Development of biobased products. *Bioresource Technology* 91(1) 1–29.
- Moreyra R Peleg M (1981) Effect of equilibrium water activity on the bulk properties of selected food powders. *Journal of Food Science* 46 1918–1922
- Nichols JR *et al.* (1998) Evaluation of corn distillers grains and ruminally protected lysine and methionine for lactating dairy cows. *Journal of Dairy Science* 81 482–491.

- Noblet J *et al.* (1994) Prediction of net energy value of feeds for growing pigs. *Journal of Animal Science* 72 344–354.
- Noll SL *et al.* (2002) Utilization of canola meal and distillers grains with solubles in market turkey diets. *Poultry Science* 81 (Suppl. 1) 92.
- Parsons CM *et al.* (1983) Distillers dried grains with solubles as a protein source for the chick. *Poultry Science* 62 2445–2451.
- Peleg M (1983) Physical characteristics of food powders. In: *Physical Properties of Foods* (Peleg M Bagley E eds). New York: AVI, 293–324.
- Peleg M Hollenbach AM (1984) Flow conditioners and anticaking agents. *Food Technology* 38(3) 93–102.
- Peter CM *et al.* (2000) The effects of corn milling coproducts on growth performance and diet digestibility by beef cattle. *Journal of Animal Science* 78 1–6.
- Pothan LA *et al.* (2003) Dynamic mechanical analysis of banana fiber reinforced polyester composites. *Composites Science and Technology* 63 283–293.
- Powers WJ *et al.* (1995) Effects of variable sources of distillers dried grains plus solubles on milk yield and composition. *Journal of Dairy Science* 78 388–396.
- Prescott JK Barnum RA (2000) On powder flowability. *Pharmaceutical Technology* October 60–84.
- Rai M *et al.* (2004) Comparison between drum and pulverized air dried distillers grain extrudates using single screw extruder. ASAE Paper No. 046067. St. Joseph, MI: ASAE. <http://www.asabe.org>.
- Ramana S *et al.* (2002a) Effect of distiller effluent on seed germination in some vegetable crops. *Bioresource Technology* 82 273–275.
- Ramana S *et al.* (2002b) Effect of distillery effluents on some physiological aspects in maize. *Bioresource Technology* 84 295–297.
- Rasco BA *et al.* (1990) Iron, calcium, zinc, and phytic acid content of yeast-raised breads containing distillers' grains and other fiber ingredients. *Journal of Food Composition and Analysis* 3(1) 88–95.
- Rausch KD Belyea RL (2006) The future of coproducts from corn processing. *Applied Biochemistry and Biotechnology* 128 47–86.
- Ray D *et al.* (2002) Impact fatigue behavior of vinylester resin matrix composites reinforced with alkali treated jute fibres. *Composites: Part A* 33 233–241.
- Rendell M *et al.* (2005) Effect of a barley breakfast cereal on blood glucose and insulin response in normal and diabetic patients. *Plant Foods for Human Nutrition* 60 63–67.
- RFA (2007a) Ethanol industry outlook 2007. Washington, D.C.: Renewable Fuels Association. <http://www.ethanolrfa.org/industry/locations/>.
- RFA (2007b) Ethanol biorefinery locations. Washington, D.C.: Renewable Fuels Association. <http://www.ethanolrfa.org/industry/locations/>.
- Roberson KD (2003) Use of dried distillers' grains with solubles in growing-finishing diets of turkey hens. *International Journal of Poultry Science* 2(6) 389–393.
- Rosentrater KA (2006a) Expanding the role of systems modeling: considering byproduct generation from biofuel production. *Ecology and Society* 11(1) 1–12.

- Rosentrater KA (2006b) Understanding distillers grains storage, handling, and flowability challenges. *Distillers Grains Quarterly* 2(1) 18–21.
- Rosentrater KA Giglio M (2005) What are the challenges and opportunities for utilizing distillers grains? *Distillers Grains Quarterly* 1(1) 15–17.
- Rosentrater KA Krishnan P (2006) Incorporating distillers grains in food products. *Cereal Foods World* 51(2) 52–60.
- Rosentrater KA *et al.* (2005) Update on Ethanol Processing Residue Properties. ASAE Paper No. 056024. St. Joseph, MI: ASAE. <http://www.asabe.org>.
- Rout RK *et al.* (2003) Spectral and thermal studies of biomass cured phenolic resin polymers. *Biomass and Bioenergy* 25 329–334.
- Schingoethe DJ *et al.* (1999) Milk production and composition from cows fed wet corn distillers grains. *Journal of Dairy Science* 82 574–580.
- Schlicher M (2005) The flowability factor. *Ethanol Producer Magazine* 11(7) 90–93, 110–111.
- Schrämli W (1967) On the measurement of the flow properties of cement. *Powder Technology* 1 221–227.
- Schwedes J (2002) Consolidation and flow of cohesive bulk solids. *Chemical Engineering Science* 57 287–294.
- Shurson G *et al.* (2004) The use of maize distiller's dried grains with solubles in pig diets. *Pig News and Information* 25(2) 75N–83N.
- Singh N Cheryan M (1998) Extraction of oil from corn distillers dried grains with solubles. *Transactions of the ASAE* 41(6) 1775–1777.
- Singh V *et al.* (2001) Recovery of phytosterols from fiber removed from distiller dried grains with solubles (DDGS). ASAE Paper No. 016012. St. Joseph, MI: ASAE. <http://www.asabe.org>.
- Singh V *et al.* (2002) Removal of fiber from distillers dried grains with solubles (DDGS) to increase value. *Transactions of the ASAE* 45(2) 389–392.
- Sloan AE (2004) The low-carb diet craze. *Food Technology* 58(1) 16.
- Spiehs MJ *et al.* (2002) Nutrient database for distiller's dried grains with solubles produced from new ethanol plants in Minnesota and South Dakota. *Journal of Animal Science* 80(10) 2639–2645.
- Sreekala MS Thomas S (2003) Effect of fibre surface modification on water-sorption characteristics of oil palm fibres. *Composites Science and Technology* 63 861–869.
- Swain SN *et al.* (2004) Biodegradable soy-based plastics: opportunities and challenges. *Journal of Polymers and the Environment* 12(1) 35–42.
- Teunou E *et al.* (1999) Characterization of food powder flowability. *Journal of Food Engineering* 39(1) 31–37.
- Thomson FM (1997) Storage and flow of particulate solids. In: *Handbook of Powder Science and Technology Second Edition* (Fayed, ME Otten L eds). New York: Chapman and Hall, 389–486.
- Thring RW *et al.* (1997) Polyurethanes from Alcell lignin. *Biomass and Bioenergy* 13(3) 125–132.

- Tibelius C (1996) Coproducts and Near Coproducts of Fuel Ethanol Fermentation from Grain. Agriculture and Agri-Food Canada—Canadian Green Plan Ethanol Program: Starchy Waste Streams Evaluation Project. http://res2.agr.ca/publications/cfar/index_e.htm.
- UMN (2007) The Value and Use of Distillers Dried Grains with Solubles (DDGS) in Livestock and Poultry Feeds. University of Minnesota. <http://www.ddgs.umn.edu/>.
- Van Everen K *et al.* (1992) Spaghetti products containing dried distillers grains: Developments in Food Science 29 551–563.
- Wahlstrom RC *et al.* (1970) Corn distillers dried grains with solubles in growing-finishing swine rations. Journal of Animal Science 30 532–535.
- Waldroup PW *et al.* (1981) The use of high levels of dried distillers grains plus solubles in broiler diets. Poultry Science 60 1479–1484.
- Wall JS *et al.* (1984) Corn distillers' grains and other by-products of alcohol production in blended foods. I. Compositional and nutritional studies. Cereal Chemistry 61(6) 504–509.
- Wang B *et al.* (2004a) Effects of chemical treatments on mechanical and physical properties of flax fiber-reinforced rotationally molded composites. ASAE Paper Number 046083. St. Joseph, MI: ASAE. <http://www.asabe.org>.
- Wang Q *et al.* (2004b) Role of hydrophilic and hydrophobic interactions in structure development of zein films. Journal of Polymers and the Environment 12(3) 197–202.
- Webster C.D *et al.* (1993) Growth, body composition, and organoleptic evaluation of channel catfish fed diets containing different percentages of distillers grains with solubles. Progressive Fish Culturist 55 95–100.
- Weigel JC *et al.* (2005) Feed Co-Products of the Dry Corn Milling Process. Iowa State University and Iowa Corn Promotion Board. http://www.iowacorn.org/ethanol/ethanol_17.html.
- Whitney MH Shurson GC (2004) Growth performance of nursery pigs fed diets containing increasing levels of corn distiller's dried grains with solubles originating from a modern Midwestern ethanol plant. Journal of Animal Science 82 122–128.
- Wu YV *et al.* (1996) Effect of diets containing various levels of protein and coproducts from corn on growth of tilapia fry. Journal of Agriculture and Food Chemistry 44 1491–1493.
- Wu YV *et al.* (1997) Use of corn-derived ethanol coproducts and synthetic tryptophan for growth of tilapia (*Oreochromis niloticus*). Journal of Agriculture and Food Chemistry 45 2174–2177.
- York P (1975) The use of glidants to improve the flowability of fine lactose powder. Powder Technology 11 197–198.
- Zhang P Whistler RL (2004) Mechanical properties and water vapor permeability of thin film from corn hull arabinoxylan. Journal of Applied Polymer Science 93 2896–2902.



Bioprocess engineer **KURT ROSENTRATER** is a lead scientist with the United States Department of Agriculture, Agriculture Research Service, at the North Central Agricultural Research Laboratory in Brookings, SD, where he spearheads an initiative to develop value-added uses for co-product and residue streams resulting from biofuel-manufacturing operations. His areas of expertise include

value-added product development, alternative recycling and reprocessing strategies for food and organic waste streams, modeling and simulation of food and organic processing systems, economic modeling, and physical and chemical characterization methods.

Dr. Rosentrater has investigated physical, nutritional, and chemical properties of corn masa, processing byproduct streams and swine slaughterhouse blood and blood components, and he has developed value-added livestock-feed applications for these waste streams by utilizing laboratory and pilot-scale extrusion processing techniques. Additionally, he has developed advanced computer models to simulate process and economic factors to aid the food industry in pursuing value-added recycling/reprocessing alternatives.

Formerly an assistant professor at Northern Illinois University, DeKalb, IL, in the Department of Engineering and Industrial Technology, Rosentrater taught research methods, manufacturing systems, engineering mechanics, and design. While in industry, he was responsible for process and equipment design as well as plant and site layout for large-scale agri-industrial facilities, including biodiesel-manufacturing plants.